

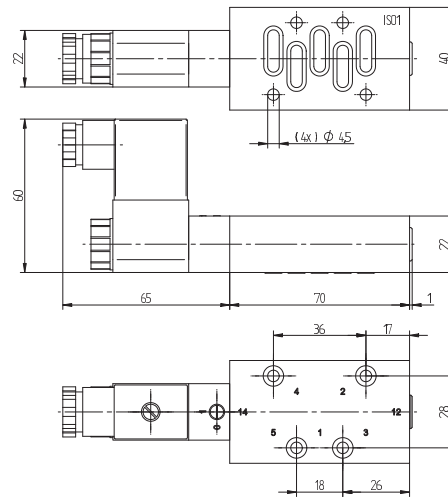


# MH 510 704 ISO1 / MH 520 704 ISO1 RP 5 704 ISO1



**MH 510 704 ISO1**

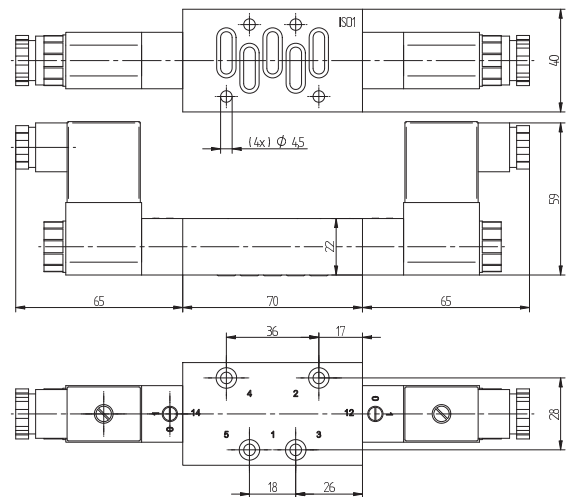

**MH 520 704 ISO1**

5-way solenoid valve and sub-base according to ISO 5599-1 size ISO 1.

Type 510 5/2-way single solenoid, with air spring return  
Type 520 5/2-way double solenoid, actuated by impulse

5/3-way centre closed available on request.

Available with solenoid operators:  
230V/50Hz, 110V/50Hz, 48V/50Hz, 24V/50 Hz, 24V=, 12V=.

Valves are generally equipped with manual override.

Mounting screws and seals are included.



**RP 5 704 ISO1**

Single sub-base with 5 x G 1/4" threads.

**ISO.1 P12**

Flange-mounted pressure regulator which can be put between the sub-base and valve.

Adjustable pressure range: 0,5 - 10 bar

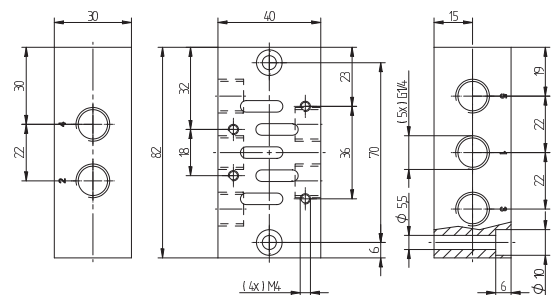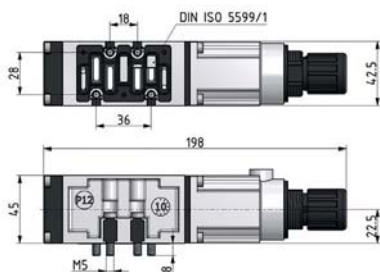

**RP 704 ISO1**

Type	Port size	Air flow	Operating press.	Power consumption	Weight
MH 510 704 ISO1	Ø 7 mm	1250 l/min	2 - 10 bar	3 W = / 5 VA ~	0,28 kg
MH 520 704 ISO1	Ø 7 mm	1250 l/min	2 - 10 bar	3 W = / 5 VA ~	0,39 kg
RP 5 704 ISO1	G 1/4"	1250 l/min		3 W = / 5 VA ~	0,23 kg