

# RD 5\_\_403



Common connection to port 1 (pressure), 3 and 5 (exhaust).


The following solenoid valves can be assembled to the manifold plate type **RD 5\_\_403**:

5/2 single sol.	G 1/8"	MD 510 403	page 2.5.2.2.1
5/2 single sol.	pif 6 mm	MD 510 463	page 2.5.2.2.1
5/2 double sol.	G 1/8"	MD 520 403	page 2.5.2.2.5
5/2 double sol.	pif 6 mm	MD 520 463	page 2.5.2.2.5
5/3-way	G 1/8"	MD 53_403	page 2.5.3.2.1
5/3-way	pif 6 mm	MD 53_463	page 2.5.3.2.1

Blanking plates are also available type BP 5 403.

Please note:

Due to the compact design of the plate if a larger number of valves are to switch at the same time please do not select plates with more than 6 stations.

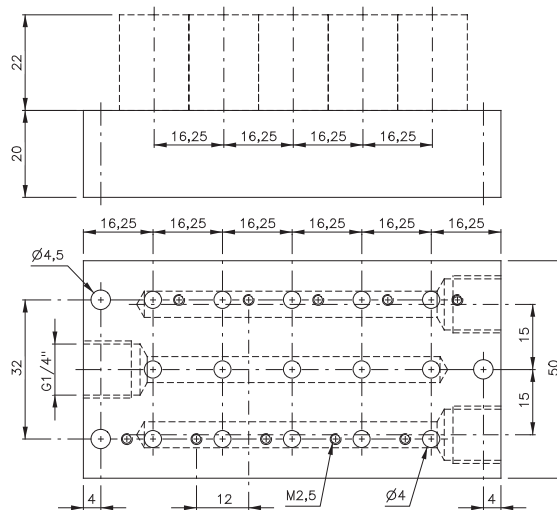

**RD 5\_\_403** Orifice size: 10 mm

Stations	Type	Weight
2	RD 502 403	0,12 kg
3	RD 503 403	0,16 kg
4	RD 504 403	0,20 kg
5	RD 505 403	0,24 kg
6	RD 506 403	0,28 kg
7	RD 507 403	0,32 kg
8	RD 508 403	0,37 kg
9	RD 509 403	0,41 kg
10	RD 510 403	0,45 kg
12	RD 512 403	0,53 kg
14	RD 514 403	0,62 kg
16	RD 516 403	0,69 kg