

RD 5__464



Common connection to port 1 (pressure), 3 and 5 (exhaust). The individual ports 2 and 4 are also in the manifold plate equipped with push-in fittings.


The following solenoid valves can be assembled to the manifold plate type **RD 5__464** (pif 6 mm):

5/2 single sol.	MD 510 404	page 2.5.2.2.3
5/2 double sol.	MD 520 404	page 2.5.2.2.3
5/3-way	MD 53_404	page 2.5.2.2.3

Blanking plates are also available type BP 5 404.

Please note:

Due to the compact design of the plate if a larger number of valves are to switch at the same time please do not select plates with more than 6 stations.

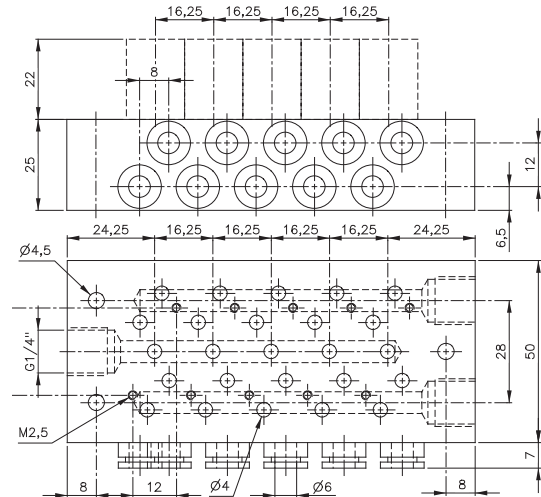

RD 5__464 Orifice size: 6 mm

Stations	Type	Weight
2	RD 502 464	0,21 kg
3	RD 503 464	0,27 kg
4	RD 504 464	0,33 kg
5	RD 505 464	0,38 kg
6	RD 506 464	0,44 kg
7	RD 507 464	0,50 kg
8	RD 508 464	0,55 kg
9	RD 509 464	0,60 kg
10	RD 510 464	0,66 kg
12	RD 512 464	0,77 kg
14	RD 514 464	0,88 kg
16	RD 516 464	0,99 kg