


BA-Series: Ø 22 mm Actuators for Panel Mounting




BA-Series: Actuating elements for 22 mm panel mounting hole. Actuators can be used with valves type BA ... displayed on page 2.2.3, 2.2.4 and 2.2.7.

- Materials: Polyamide
- Temperature range: -25°C ... +55°C (consider temperature limitations of the valve)
- IP protection: IP 65 (IP 66 with dust protection cap BA 221 SSK)

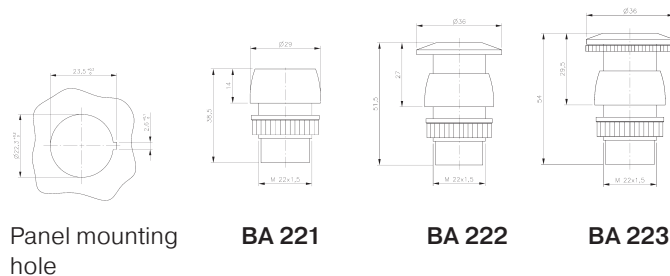

Actuating elements can be used in explosion hazardous environment zone 2 and 22.

According to the directive 2014/34/EU, Article 1 and Article 2, these products do not fall under the scope of the ATEX directive, because they are not capable of causing an explosion through their own potential sources of ignition. So, these products are not marked in terms of the ATEX directive. An ignition risk assessment has been carried out.

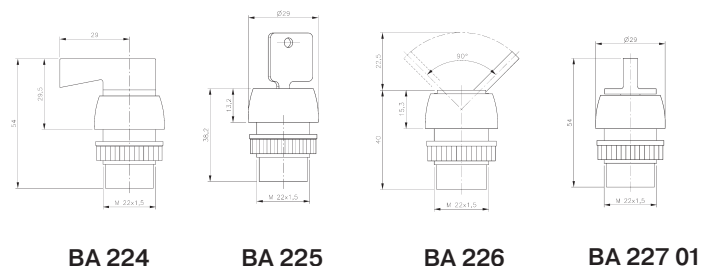













BA 221 __ and BA 225 00 can be used in explosion group IIC / IIIC.

BA 222 01, BA 223 02, BA 224 01, BA 226 01 and BA 227 01 can be used in explosion group IIB / IIIC.



BA 221 SSK

Type	Actuation	Colour	Actuating force	Weight
BA 221 01	Push button	black	16 N	0,014 kg 
BA 221 02	Push button	red	16 N	0,014 kg 
BA 221 03	Push button	green	16 N	0,014 kg 
BA 221 04	Push button	yellow	16 N	0,014 kg 
BA 221 05	Push button	blue	16 N	0,014 kg 
BA 221 06	Push button	white	16 N	0,014 kg 
BA 222 01	Palm button	black	16 N	0,020 kg 
BA 223 02*	Palm button w. detend	red	27 N	0,026 kg 
BA 224 01	Rotary lever long	black	42 N/cm	0,021 kg 
BA 225 00	Locking switch		25 N	0,080 kg 
BA 226 01	Switch	black	16 N/cm	0,019 kg 
BA 227 01	Rotary lever short	black	16 N/cm	0,018 kg 
BA 221 SSK	Transparent dust protection cap for BA 221 __			0,009 kg

* available on request: for 30 mm panel mouting hole.