





# DIRECT-ACTIVATED PRESSURE RELIEF VALVE



- ▶ The whole set is made by stainless steel #316, and it is suitable for water, steam, acid & alkaline fluid, or oil.
- ▶ Pressure Relief Valve is a safety device for pipes and it is normally closed. When pressure increases to setting value, pressure relief valve rapidly releases the over high pressure. When pressure returns to safety value, pressure relief valve will automatically close to ensure the safety of equipment.

- ▶ Pressure Adjusting Range : 0.5 ~ 10 kgf/cm<sup>2</sup>  
(1 kgf/cm<sup>2</sup> = 14.2 psi)      7 ~ 20 kgf/cm<sup>2</sup>
- ▶ Applied Temperature : -15 ~ 100°C  
100 ~ 180°C (For Steam)
- ▶ Valve Body Testing Pressure : 35 kgf/cm<sup>2</sup>
- ▶ Maximum Applied Pressure : 25 kgf/cm<sup>2</sup>

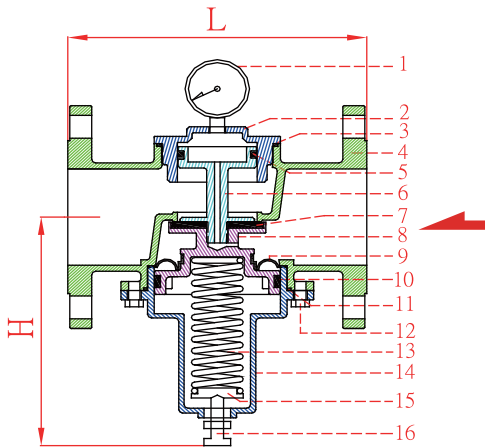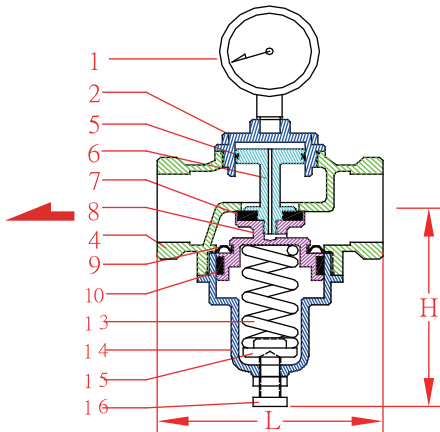

No	Part Name	Material
1	Gauge	Stainless Steel
2	Upper Cover	Stainless Steel 316
3	O-ring	NBR / Viton
4	Main Body	Stainless Steel 316
5	U-ring	NBR / Viton
6	Shaft	Stainless Steel 316
7	Sealing Spacer	NBR / Viton
8	Seat	Stainless Steel 316
9	Diaphragm	NBR / Viton
10	UH-ring	NBR / Viton
11	O-ring	NBR / Viton
12	Fixed Bolt	Stainless Steel 304
13	Spring	Spring Steel
14	Lower Cover	Stainless Steel 316
15	Washer	Brass
16	Adjusting Stem	Stainless Steel 304

(Thread End)

Item No	Size	H(mm)	L(mm)	Weight(kg)	CV
RLT15-S	1/2"	85	70	0.8	2.4
RLT20-S	3/4"	105	85	0.9	9.0
RLT25-S	1"	105	90	1.0	11.0
RLT40-S	1.5"	130	115	2.2	21.0
RLT50-S	2"	130	120	3.1	25.0

(Flange End)

Item No	Size	H(mm)	L(mm)	Weight(kg)	CV
RLF15-S	1/2"	85	150	2.0	2.4
RLF20-S	3/4"	105	150	2.8	9.0
RLF25-S	1"	105	150	3.5	11.0
RLF40-S	1.5"	130	190	5.9	21.0
RLF50-S	2"	130	190	6.5	25.0
RLF65-S	2.5"	185	210	11.5	75.0
RLF80-S	3"	185	225	12.0	80.0
RLF100-S	4"	230	250	19.0	120.0
RLF150-S	6"	290	310	45.0	250.0

Flow Chart of Direct-Activated Pressure Relief Valve

